




High Efficiency, High Performance, 60 Cells

MULTI

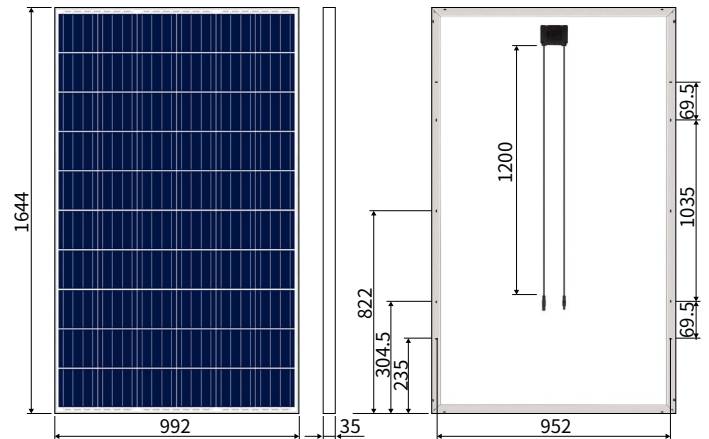

Item	SS-BP260	SS-BP265	SS-BP270
Peak Power(Wp)	260	265	270
Open Circuit Voltage(V)	37.70	38.00	38.30
Short Circuit Current(A)	9.03	9.09	9.16
Voltage at Pmax(V)	30.60	30.90	31.20
Current at Pmax(A)	8.51	8.58	8.66
Efficiency(%)	15.94	16.25	16.56
Dimension(mm)	992 X 1,644 X 35		
Weight(Kg)	18.4 ± 0.1		

※ All data is tested under STC(Standard Test Conditions). Above data may be changed without prior notice.

• Peak power tolerance 0 ~ +3.0%




فروشگاه اروین سولار
تلفن : ۰۲۱-۳۳۹۹۹۰۵۶ : همت بلند
۰۲۱-۳۳۹۹۹۰۷۲

www.ervinsolar.ir
ervinsolar@hotmail.com

Temperature Coefficient (Cell)

NOCT	45 ± 3(°C)
$\alpha \Delta$ ISC	0.0490(%/degree)
$\beta \Delta$ VOC	- 0.3330(%/degree)
$\gamma \Delta$ Pmax	- 0.4200(%/degree)

I-V Curve

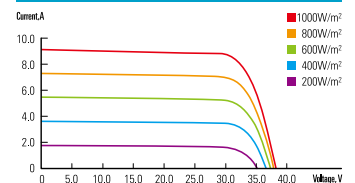

Mechanical Characteristics

Solar Cells	156.75 x 156.75mm
Front Glass	Low Iron Tempered Glass
Junction Box	JM13D: IP67 / 3Bypass Diode
Output Cable	4mm² Cable, MC 4(Compatible) Type
Frame	AL Alloy Type(Anodized)

Tested Operation Conditions

Max Load	Mono: 550kgf/m²(5400Pa) Multi: 734kgf/m²(7200Pa)
Impact Resistance	25mm, 23m/s
Operating emperature	-40 ~ +85°C
System Voltage	1,000V

Safety Ratings & Warranties

Fire Safety Classification	Class "C"
Salt-mist Corrosion Test	Tested
Visible Light Reflected	Mono (~ 5.00%), Multi(~ 5.00%) For more information, please contact us.
	10 Years limited Product Warranty
Warranty	10 Years limited Power Warranty : 90%
	25 Years limited Power Warranty : 80%
Certifications	IEC 61215, IEC 61730

