

EFH 10/14 DC 1p



Specifications

| | |
|--------------------------|---|
| ETI Code | 002580001 |
| Description | EFH 10/14 DC 1p |
| Class name | Fuse disconnecter |
| Rated current (A) | 40 |
| To use with | CH gPV fuse-links |
| Size | 10x85, 10/14x85 |
| No. Of poles | 1 |
| Utilization category | PV-0 |
| Connection | 0,75 - 16mm ² |
| Rated DC voltage (V) | 1500 |
| Mounting | 35mm DIN rail |
| Ambient temperature (°C) | -5...+40°C |
| Standards | IEC 60947-1, IEC 60947-3, UL 4248-1, UL 4248-19 |
| Application | Photovoltaic Installation |
| UL certificate | E356295 |

Online product page

Other documentation



Technical data catalogue


3D Model

CE declaration

ETIM international classification

| | |
|------------------------------------|-----------------------------|
| Classification | EC002705 |
| Class name | Holder for cylindrical fuse |
| Number of knife blade fuse holders | 1 |
| Application | Photovoltaic Installation |
| Rated current | 40 |
| Rated voltage DC | 1500 |
| Construction size | 10x85, 10/14x85 |
| Nominal voltage | 1500V |
| Mounting method | Other |
| For fuse size | 10x85 mm |
| Number of poles | 1 |
| Degree of protection (IP) | IP20 |

Dimension drawing

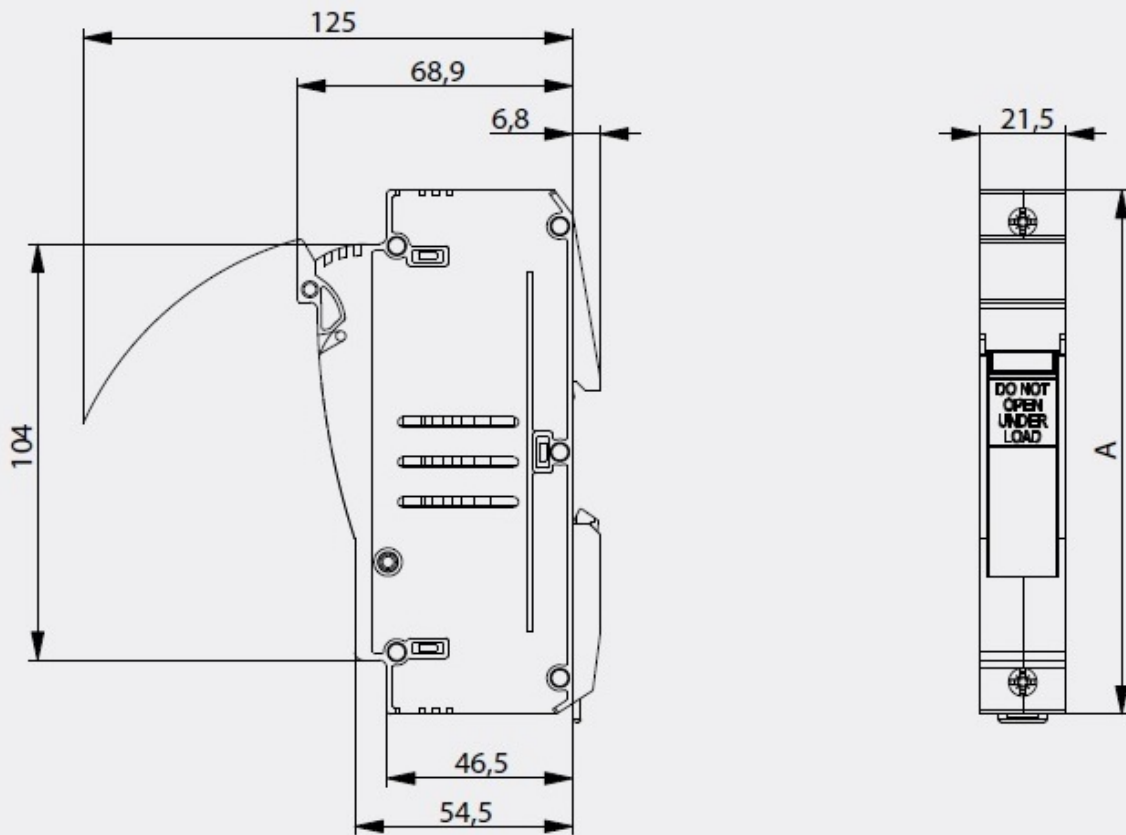

| | A |
|-------------|-------|
| EFH 10/14 | 131 |
| EFH 10/14 T | 135,6 |