

CH10/14x85 gPV 32A/1500V



Specifications

ETI Code	002626237
Description	CH10/14x85 gPV 32A/1500V
Class name	Fuse link
Rated current (A)	32
Type	CH
Size	CH10/14x85
Characteristics	gPV
Rated DC voltage (V)	1500
Indicator	None
Breaking capacity DC (kA)	50
Power dissipation (W)	7,4
Standards	IEC 60269-6, UL 248-19
Power dissipation (0,7xI _n) (W)	3
Operating joule integral (A2s)	938,7
L/R (ms)	2
Prearcing joule integral (A2s)	158,5
Application	For protection of photovoltaic modules
UL certificate	E347771
efuse	1

Online product page

Other documentation




[Technical data catalogue](#)
[Certificate](#)
[3D Model](#)
[CE declaration](#)
[Eplan file](#)

ETIM international classification

Classification	EC002704
Class name	Cylindrical fuse
Rated current	32A
Rated voltage DC	1500
Application	For protection of photovoltaic modules
Construction size	Other
Type of fuse status indicator	None
Rated voltage	1500V
Voltage type	DC
Utilization category	Other

Characteristics

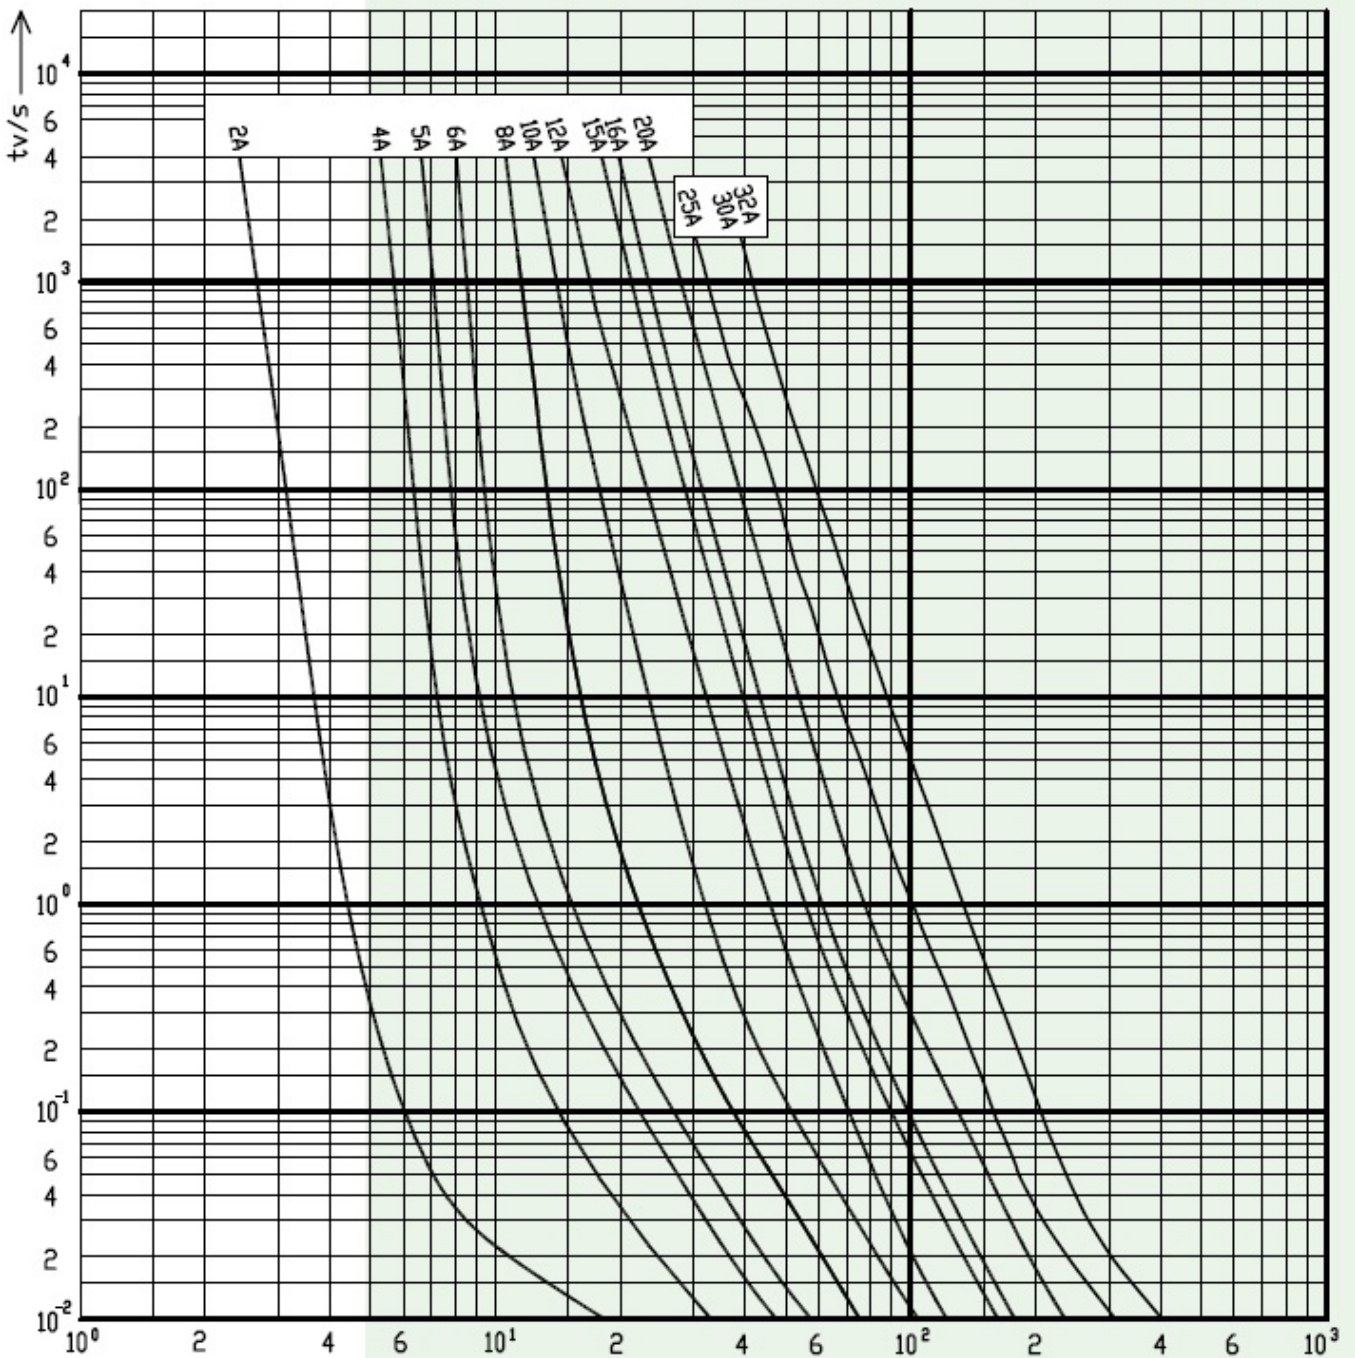

Dimension drawing

