

NH00 400A/80V DC



Specifications

ETI Code	004110108
Description	NH00 400A/80V DC
Class name	Fuse link
Rated current (A)	400
Type	NH
Size	NH00
Characteristics	Other
Rated DC voltage (V)	80
Indicator	Top fuse status indicator
Breaking capacity DC (kA)	25
Power dissipation (W)	20
Standards	IEC 60269
Operating joule integral (A2s)	900.000
L/R (ms)	20
Prearcing joule integral (A2s)	630.000
Application	Fuse-link for DC application.
efuse	1

[Online product page](#)

Other documentation



[Technical data catalogue](#)

[3D Model](#)

[Instruction manual](#)


[Eplan file](#)

ETIM international classification

Classification	EC000055
Class name	Low Voltage HRC fuse
Construction size	NH00
Rated current	400
Rated voltage	80
Voltage type	DC
Rated switching capacity	25
Utilization category	Other
Type of fuse status indicator	Top fuse status indicator
Insulated metal gripping lugs (IMGL)	

Characteristics

Time-current characteristics

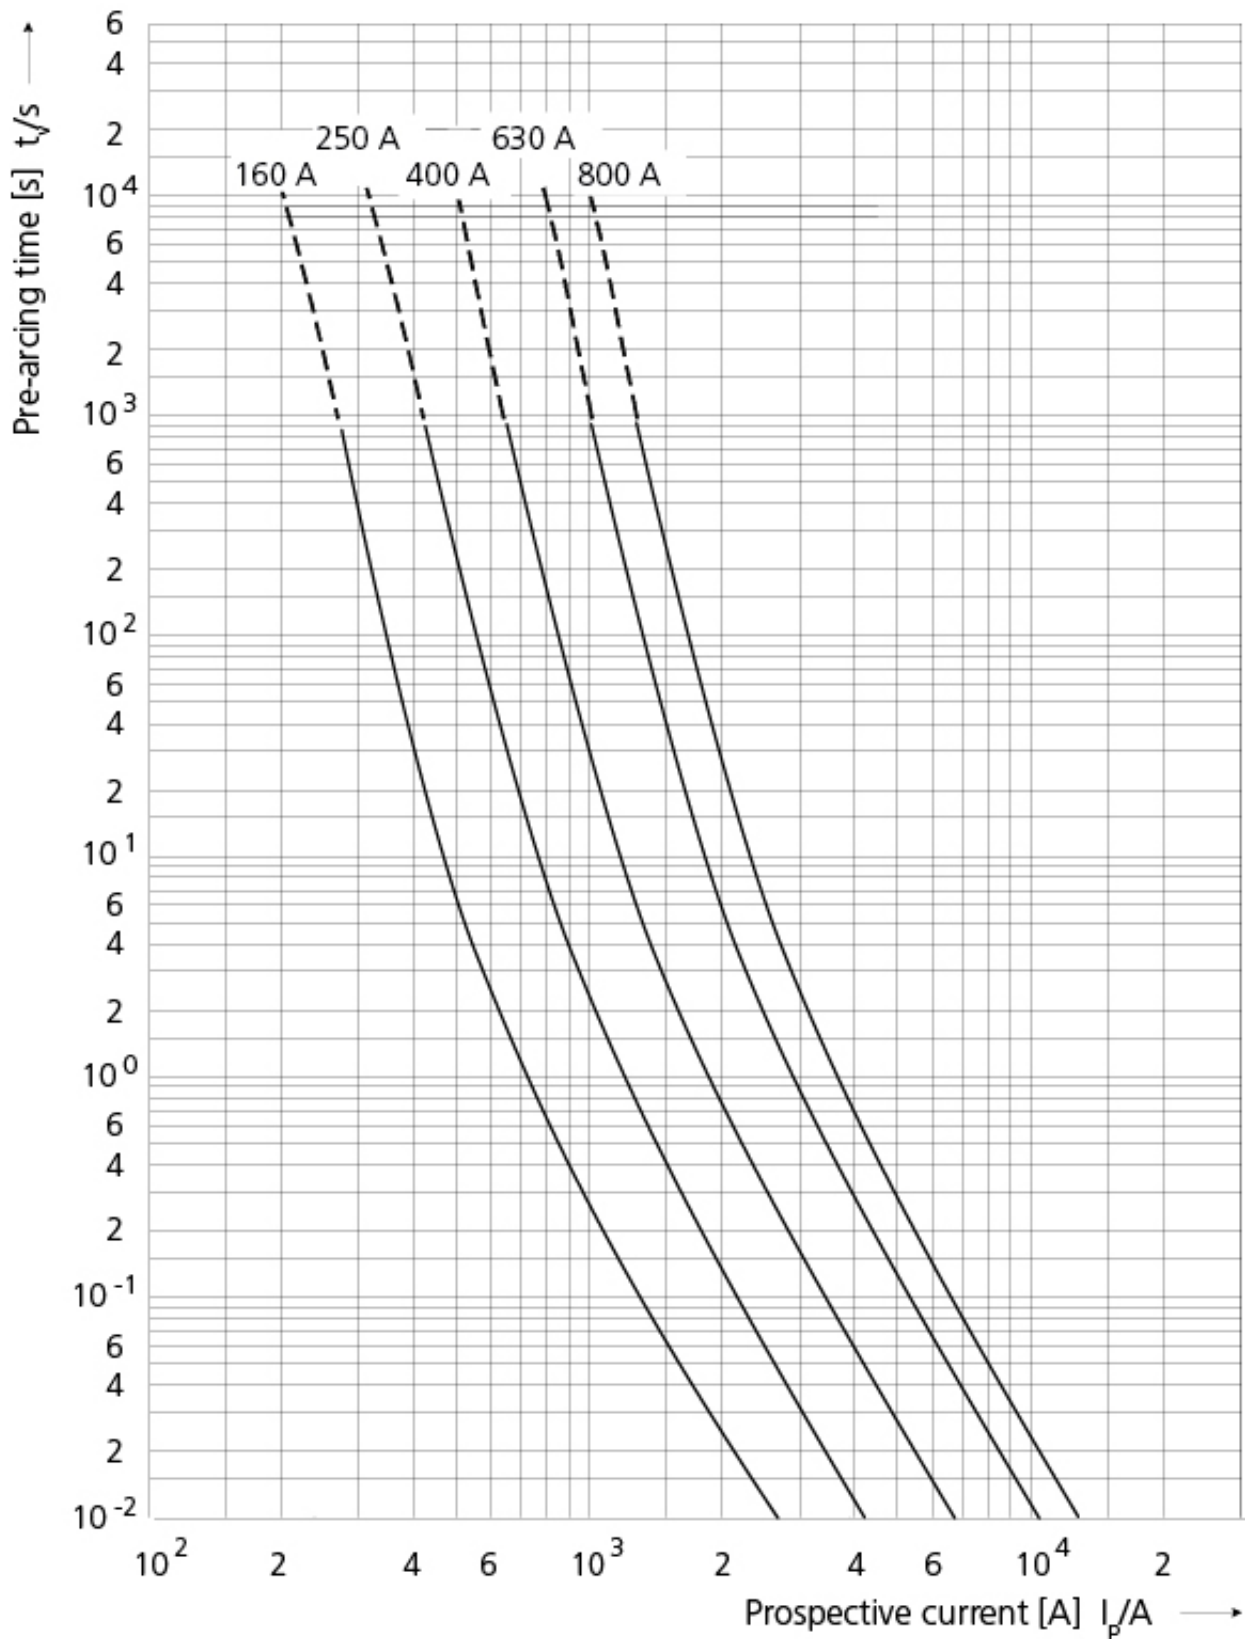

Dimension drawing

