

NH00 315A/250V DC



Specifications

ETI Code	004110134
Description	NH00 315A/250V DC
Class name	Fuse link
Rated current (A)	315
Type	NH
Size	NH00
Characteristics	gR
Rated DC voltage (V)	250
Indicator	Top fuse status indicator
Breaking capacity DC (kA)	25
Power dissipation (W)	24
Standards	IEC 60269-2
L/R (ms)	20
Application	Fuse-link for DC application.
efuse	1

[Online product page](#) 

Other documentation



[Technical data catalogue](#)

[3D Model](#)

[Instruction manual](#)


[CE declaration](#)

[Eplan file](#)

ETIM international classification

Classification	EC000055
Class name	Low Voltage HRC fuse
Construction size	NH00
Rated current	315
Rated voltage	250
Voltage type	DC
Rated switching capacity	25
Utilization category	gR (general purpose semiconductor protection)
Type of fuse status indicator	Top fuse status indicator
Insulated metal gripping lugs (IMGL)	

Characteristics

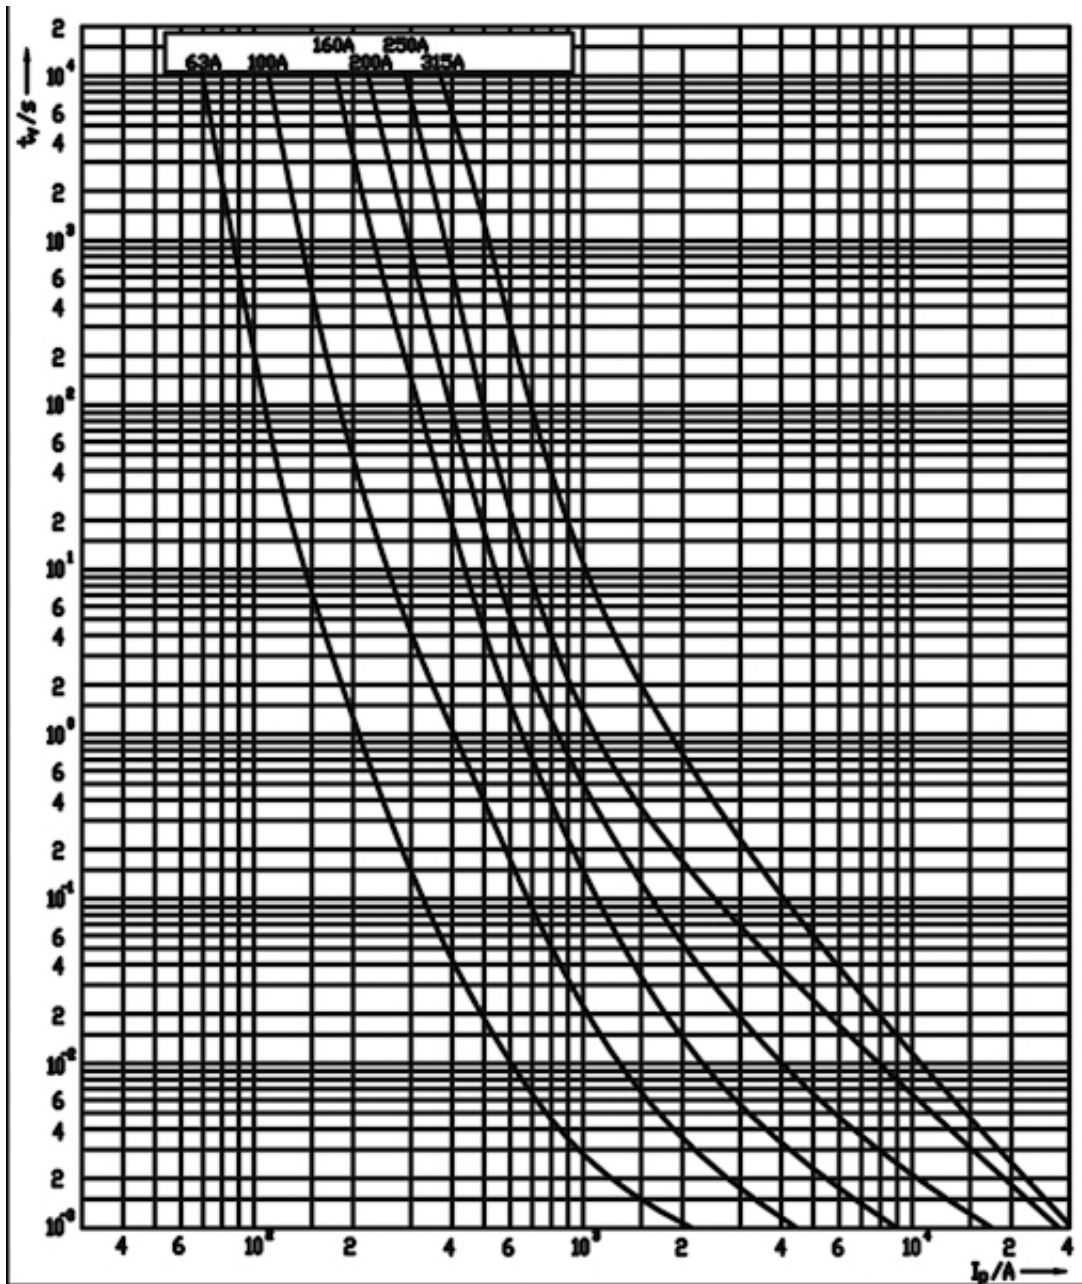

Dimension drawing

