

NH000 20A/440V DC



Specifications

ETI Code	004110200
Description	NH000 20A/440V DC
Class name	Fuse link
Rated current (A)	20
Type	NH
Size	NH000
Characteristics	gR
Rated DC voltage (V)	440
Indicator	Top fuse status indicator
Breaking capacity DC (kA)	50
Power dissipation (W)	7,2
Standards	IEC 60269-2
L/R (ms)	20
Application	Fuse-link for DC application.
efuse	1

[Online product page](#)

Other documentation



[Technical data catalogue](#)

[3D Model](#)


[Instruction manual](#)

ETIM international classification


Classification	EC000055
Class name	Low Voltage HRC fuse
Construction size	NH000
Rated current	20
Rated voltage	440
Voltage type	DC
Rated switching capacity	50
Utilization category	gR (general purpose semiconductor protection)
Type of fuse status indicator	Top fuse status indicator
Insulated metal gripping lugs (IMGL)	

Characteristics

Time-current characteristics

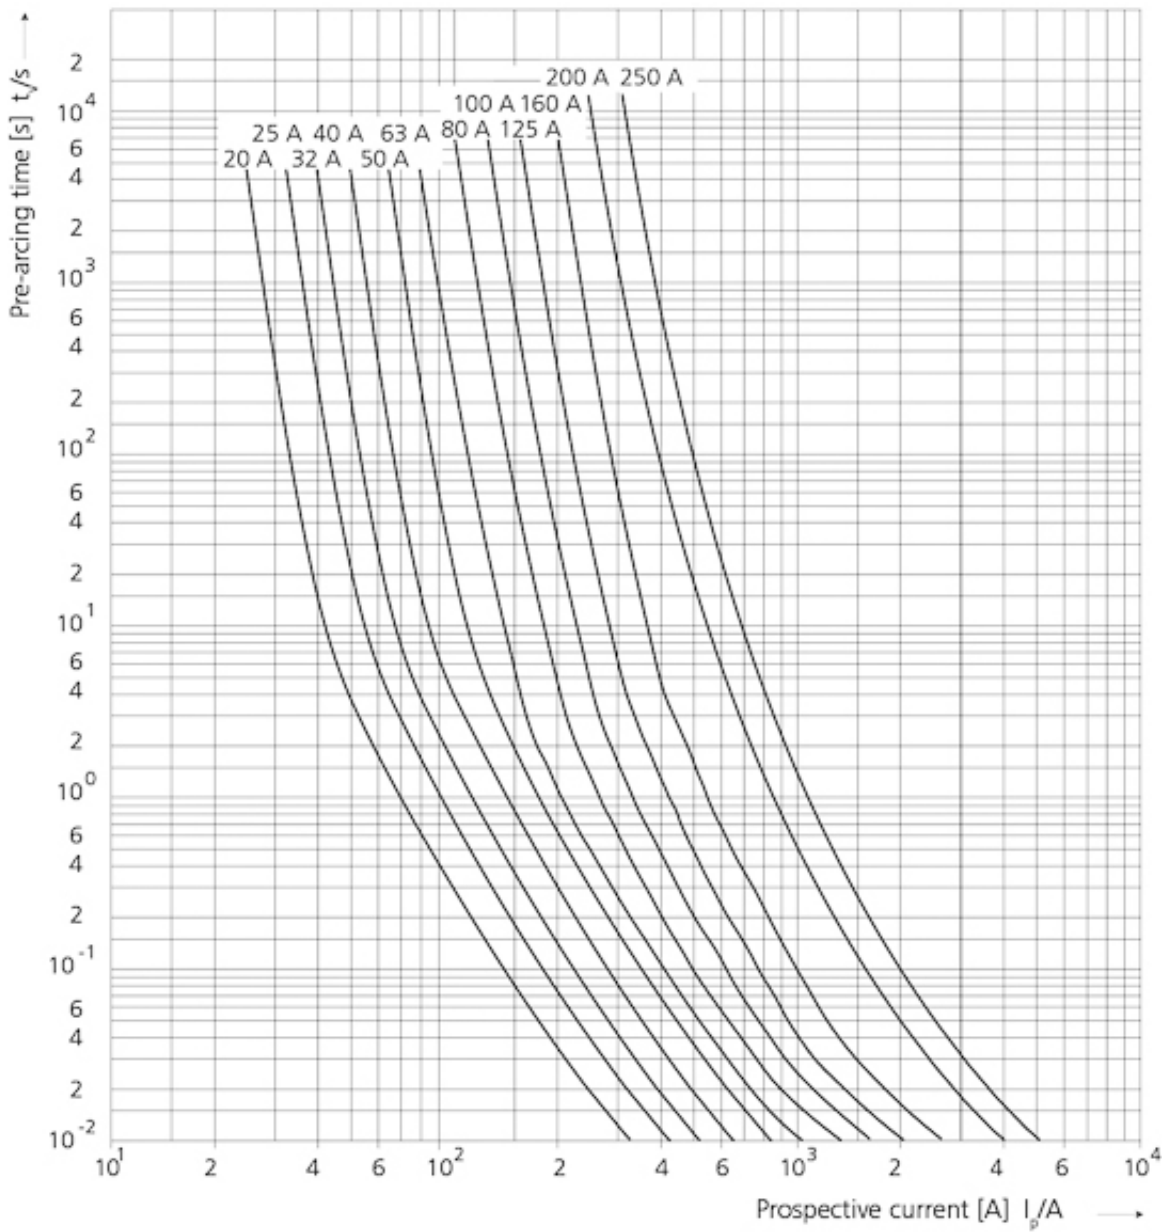

Dimension drawing

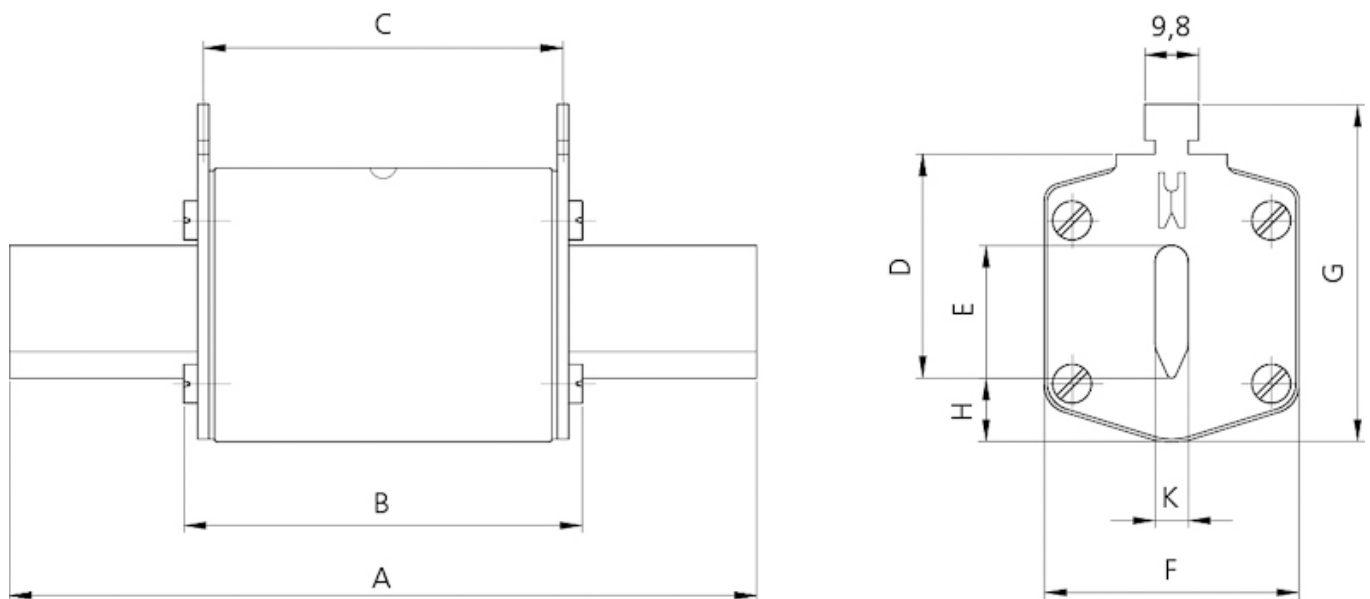

type	dimensions [mm]								
	A	B	C	D	E	F	G	H	K
00 C	79	53	47	35	15	21	52	7,5	6
00	79	53	47	35	15	28	56	12	6
1 C	135	68	65	40	15	28	61	12	6
1	135	72	65	40	20	46	65	14	6