

# G3LM aR 800A/1000V DC



## Specifications

ETI Code	004305636
Description	G3LM aR 800A/1000V DC
Class name	Fuse link
Rated current (A)	800
Type	NH
Size	3L
Characteristics	aR
Rated DC voltage (V)	1000
Indicator	Centre trip indicator for MK
Breaking capacity DC (kA)	30
Power dissipation (W)	139
Standards	IEC 60269-4
Operating joule integral (A2s)	1.000.000
L/R (ms)	1
Prearcing joule integral (A2s)	500.000
Application	Fuse-link for DC application.
efuse	1

Online product page

## Other documentation



Technical data catalogue


3D Model

Instruction manual

## ETIM international classification

Classification	EC000055
Class name	Low Voltage HRC fuse
Construction size	Other
Rated current	800
Rated voltage	1000
Voltage type	DC
Rated switching capacity	30
Utilization category	aR (accompanied semiconductor protection)
Type of fuse status indicator	Centre fuse status indicator
Insulated metal gripping lugs (IMGL)	

# Characteristics

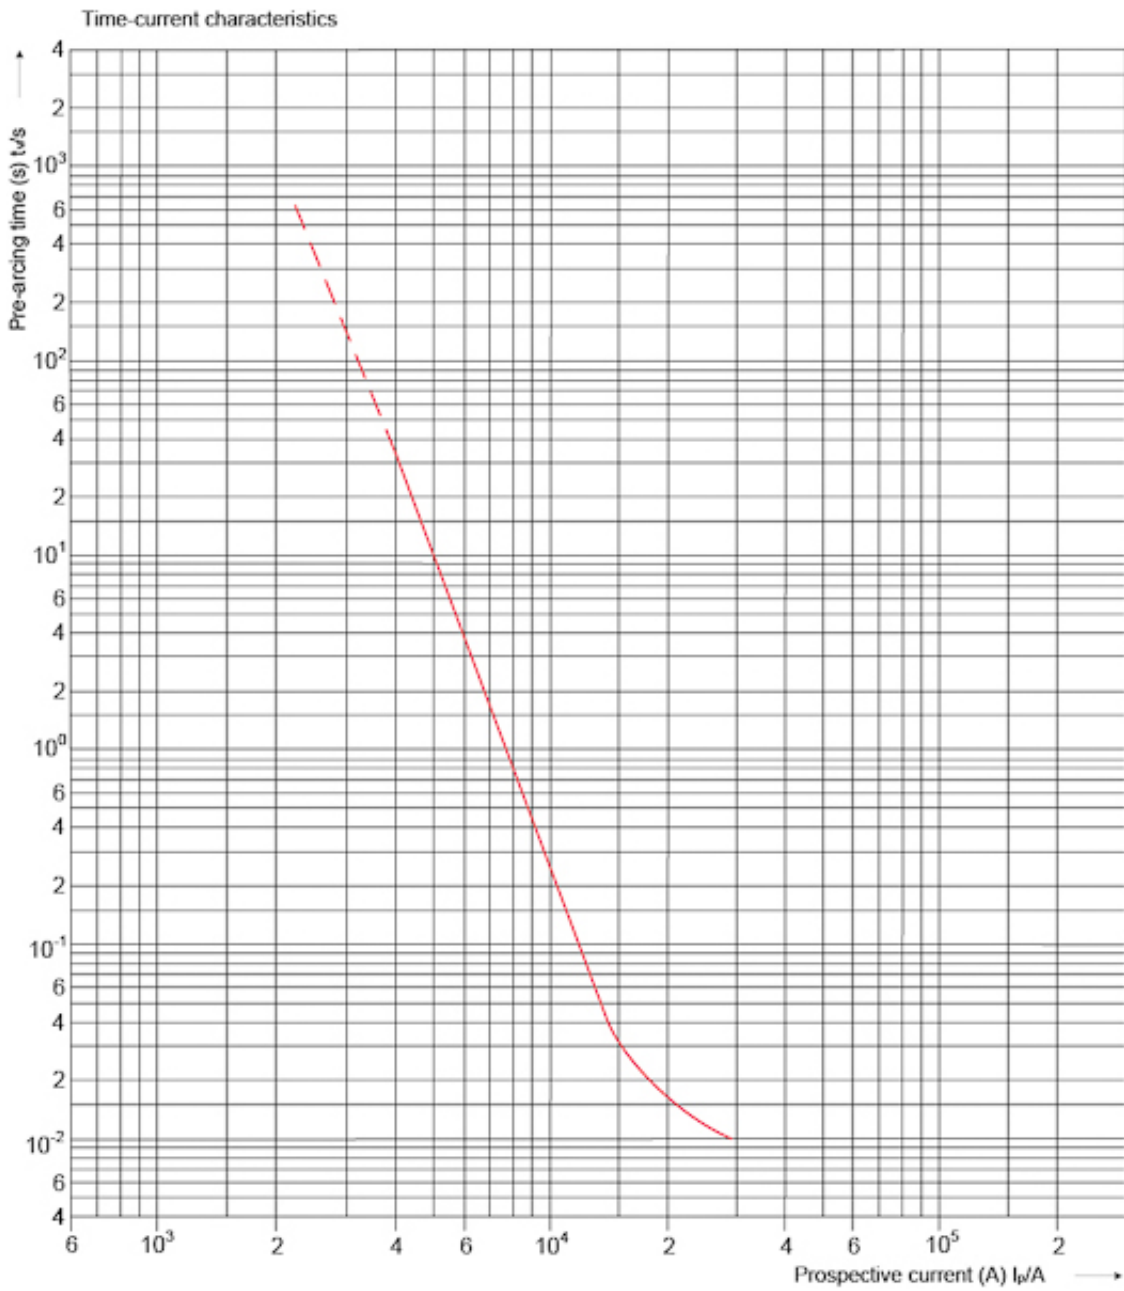

## Dimension drawing

